



CONCRETE SOAK WELLS




Description	Volume (Ltr)	25mm Drainage Holes	Internal Diameter	Outside Diameter	Depth	Inlet Invert Level	Item N°	Weight
600 x 600	169	12	600	710	600	385	234716	182kg
900 x 600	381	12	900	1020	600	385	234711	264kg
900 x 900	572	18	900	1020	900	685	234708	394kg


NOTE: No rebate on 600 & 900 soakwells




Description	Volume (Ltr)	80x30mm Drainage Holes	Internal Diameter	Outside Diameter	Depth	Inlet Invert Level	Item N°	Weight
1070 x 600	539	8	1070	1220	600	385	234724	377kg
1070 x 900	809	16	1070	1220	900	685	234728	563kg
1070 x 1200	1079	24	1070	1220	1200	985	234732	764kg



Description	Volume (Ltr)	80x30mm Drainage Holes	Internal Diameter	Outside Diameter	Depth	Inlet Invert Level	Item N°	Weight
1200 x 600	678	6	1200	1350	600	220	234734	426kg
1200 x 900	1017	12	1200	1350	900	550	234736	629kg
1200 x 1200	1357	18	1200	1350	1200	840	234738	855kg
1200 x 1500	1639	24	1200	1350	1500	1120	234740	1082kg

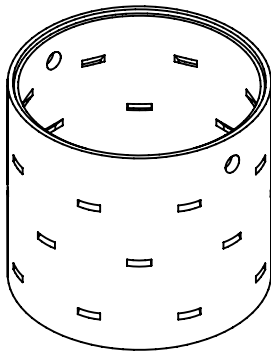

Description	Volume (Ltr)	80x30mm Drainage Holes	Internal Diameter	Outside Diameter	Depth	Inlet Invert Level	Item N°	Weight
1500 x 600	1060	6	1500	1650	600	230	234745	529kg
1500 x 900	1590	12	1500	1650	900	550	234748	787kg
1500 x 1200	2120	18	1500	1650	1200	840	234751	1045kg
1500 x 1500	2562	24	1500	1650	1500	1140	234757	1301kg

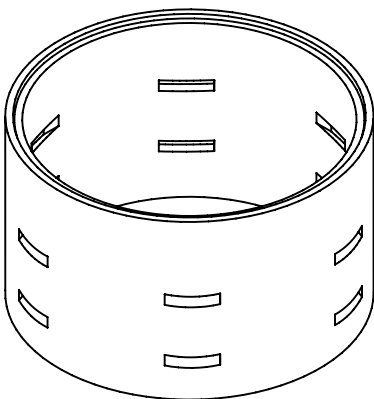

Description	Volume (Ltr)	200x55mm Drainage Holes	Internal Diameter	Outside Diameter	Depth	Inlet Invert Level	Item N°	Weight
1800 x 600	1526	6	1800	1980	600	—	234807	737kg
1800 x 900	2290	12	1800	1980	900	—	234811	1110kg
1800 x 1200	3053	18	1800	1980	1200	—	234815	1468kg
1800 x 1500	3817	18	1800	1980	1500	—	234819	1863kg
1800 x 1800	4580	30	1800	1980	1800	—	234823	2230kg

NOTE: 1800 Soakwell inlets are knocked in after installation

